


FLOCKING LINE



Laboratory Flocking Line - mod. LFL



The **Laboratory Flocking Line mod. LFL** consists of:


- Trolley supporting frame for all machine elements
- One hopper with variable speed motorized rotating brush, adjustable through inverter. A handwheel is provided for height adjustment. The hopper is equipped with two net frames with different meshes for different types of flock
- Beater bar located under the hopper
- Two different methods to guide the fabric which requires flocking:
 - with conveyor belt (with manual motion)
 - with frame for **Laboratory Oven & Direct Coating Head mod. JP** (see leaflet)

Passage of the fabric under the hopper can be repeated, in order to simulate the same conditions of a flocking machine equipped with multiple hoppers

- Drawer equipped hopper for excess flock
- Electrostatic generator with adjustable tension from 0 to 50.000 Volt
- Control board.

Options:

- Suction slot located at flocking area outlet and connected to an exhauster, filter and flock recovery bag
- AC motorized conveyor belt which can be synchronized to a laboratory coating line.

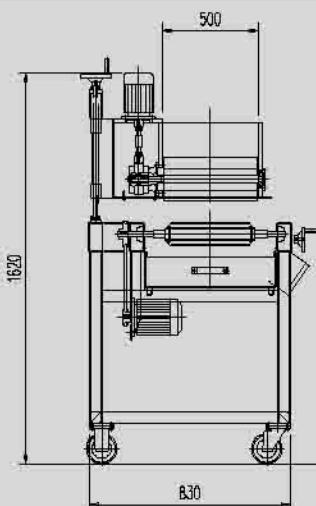

TECHNICAL DATA

Useful width	500 mm
Power supply	400 V/50 Hz/three-phase
Installed power	1 Kw

